

BOYASAN CHEMICAL LTD.CO.

Factory

Organize Sanayi Bölgesi 12.Cad.No:11 PK. 38070 Melikgazi / KAYSERİ TÜRKİYE Ph. +90 352 321 22 22 Fax. +90 352 321 22 25


İç Anadolu Office

İvedik Organize Sanayi Bölgesi Melih Gökçek Bulvarı No 18/30 PK. 06374 Yenimahalle/ANKARA TÜRKİYE Ph. +90 312 395 87 23 Fax. +90 312 395 87 24

www.bpc.com.tr bpc@bpc.com.tr





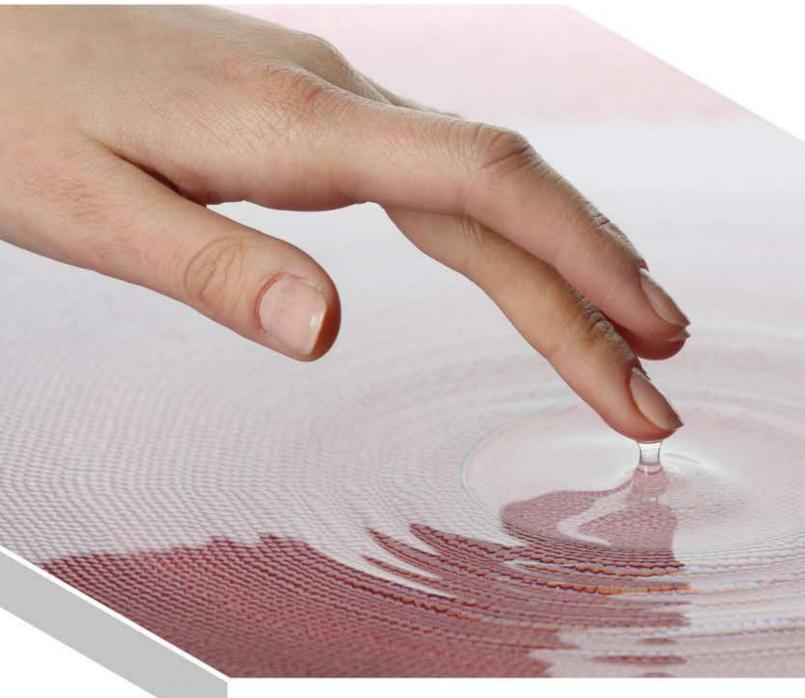




BPCOAT**SF**

Soft Feeling

BPCOAT-SF Series, are thermoset powder coatings that provide soft feeling that are ideal for surfaces needing that special touch. Soft-feel coatings have tactile properties, are mainly matte, and both look and feel similar to leather or velvet. These coatings are offering superior weathering and chemical resistance.

Silky surfaces..



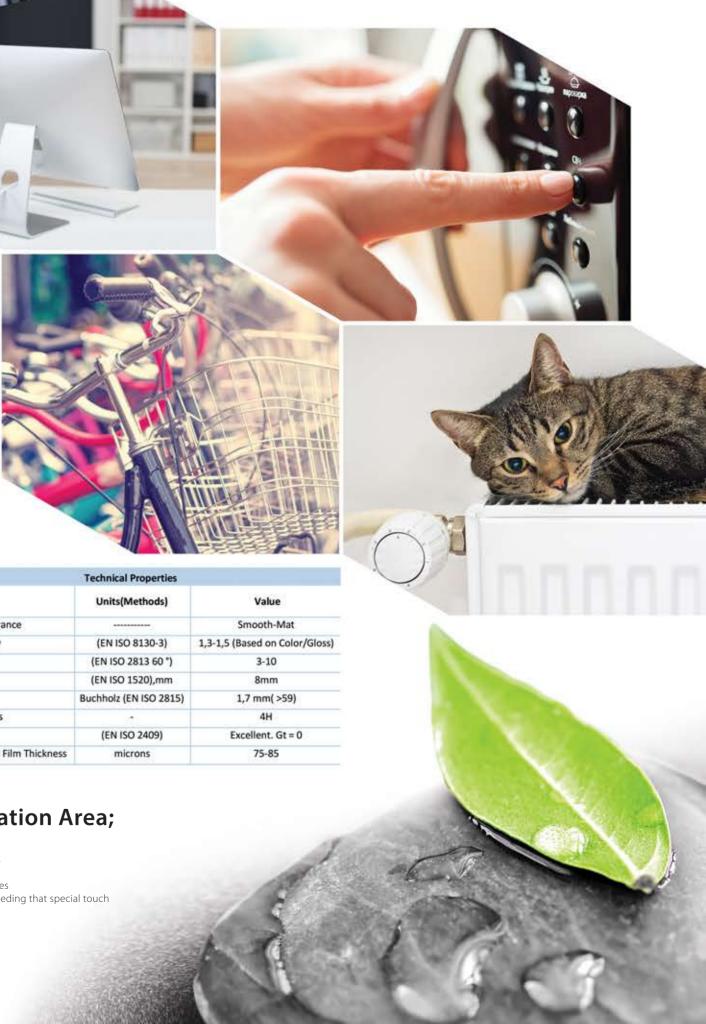

Technical Properties		
Tests Done	Units(Methods)	Value
Surface Appearance	and the second sec	Smooth-Ma
Specific Gravity	(EN ISO 8130-3)	1,3-1,5 (Based on Co
Gloss	(EN ISO 2813 60 *)	3-10
Cupping Test	(EN ISO 1520),mm	8mm
Hardness	Buchholz (EN ISO 2815)	1,7 mm(>5
Pencil Hardness	17.0	4H
Adhesion	(EN ISO 2409)	Excellent. Gt
Recommended Film Thickness	microns	75-85



Features;

- Soft touch feeling
- Avaliable in a wide range of colors
- Indoor and outdoor use
- Over-bake resistance
- High corrosion resistance and outstanding durability